


665 RSV Resilient Seated Gate Valve Rising Stem PN16

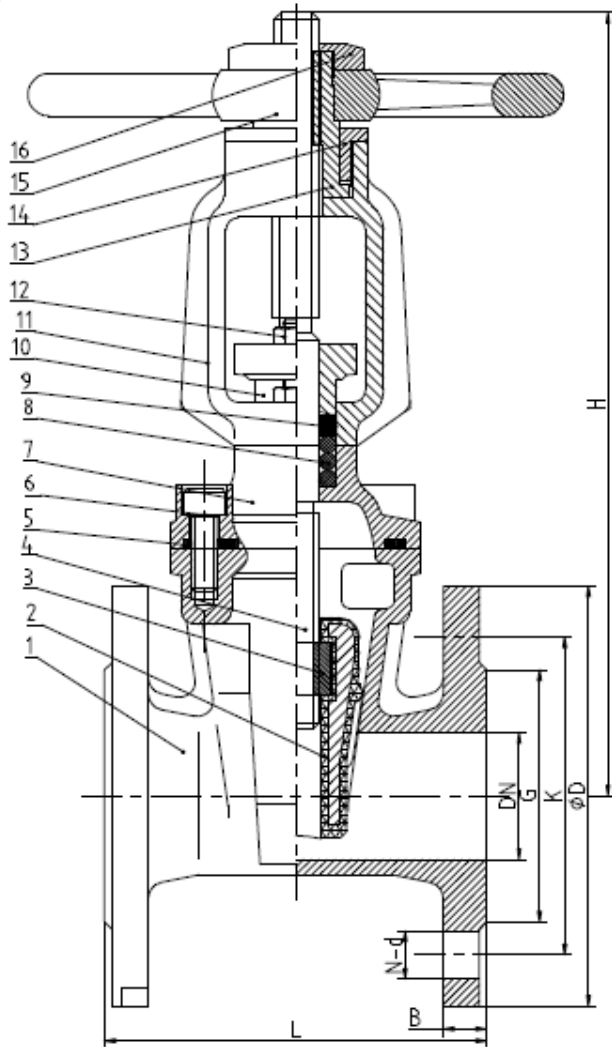

DN	L	H/W Día	C	D	K	G	f	B	Weight (kg)	
50	178	327	178	165	125	99	3	19	16	
80	203	405	203	200	160	132	3	19	22	
100	229	452	254	220	180	156	3	19	26	
150	267	615	305	285	240	211	3	19	45	
200	292	775	356	340	295	266	3	20	70	
250	330	900	400	405	355	319	3	22	103	
300	356	1008	457	460	410	370	4	24.5	143	
*Enquire for larger sizes					*All Dimensions in mm					

- Design & Manufacture to BS5163
- Face to face according to BS5163
- End Connection: EN1092-2 PN16 Undrilled
- Working Pressure: PN16
- Working Temperature: -10°C~ +100°C

No.	Part Name	Material
1	Body	Ductile iron
2	Disc	Ductile Iron - EPDM Encapsulated
3	Disc Nut	Brass
4	Stem	X20Cr13
5	Gasket	NBR/EPDM
6	Bonnet Nut	Q235A
7	Bonnet	Ductile Iron
8	O-Ring	NBR
9	Gasket	PRFE
10	Gland	Ductile Iron
11	Yoke	Ductile Iron
12	Bolt	X20Cr13
13	Nut	Brass
14	Nut	Ductile Iron
15	Handwheel	Ductile Iron
16	Nut	Brass

DRAWN BY:	XF
CHECKED BY:	CY
APPROVED BY:	CY

SURE SEAL
THIS PROPERTY AND DESIGN IS THE PROPERTY OF SURE SEAL AND MUST NOT BE DISCLOSED TO ANY THIRD PARTY WITHOUT THE CONSENT OF THE COMPANY IN WRITING AND IS TO BE RETURNED ON REQUEST
TITLE: RISING STEM GATE VALVE BS5163

NO.	REVISION:	SIG:	DATE:	DRAWING NO: SS 665 RSV RS	PART NO.:	SHEET:	SIZE:	SCALE: N.T.S	REV:
-----	-----------	------	-------	---------------------------	-----------	--------	-------	--------------	------